




### This model includes :

- Exhaust and air supply manual, automatic or remotely start/stop
- Complete air supply unit management
- Interruption and reset of cooking equipment
- Exhaust hood lights control
- Fire protection management according to NFPA 96

### Frequently requested options :


- SMART variable speed control processor  
For more information on the SMART variable system please refer to the SMART section of Cadexair.com
- Manual or automatic double speed exhaust control

Specifications	
Installation	Wall-mounted or embedded
Boitier	Painted steel 16 MSG; Gray polyester finish
Voltage	120V
Amperage	15A
Standard	 Nema 4


Need a *custom design* ? Contact us !

1

## Mecanical specifications

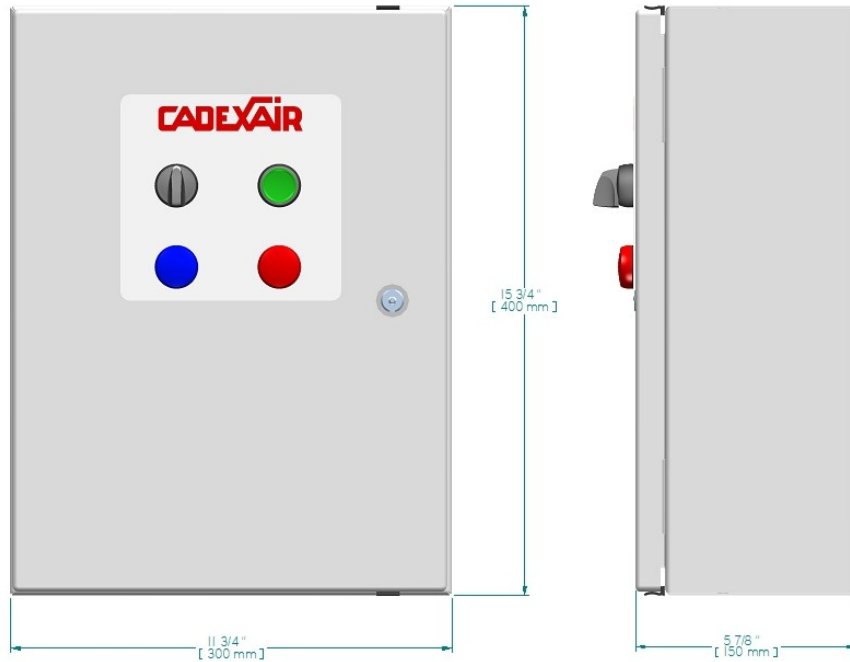

## Wiring schematics

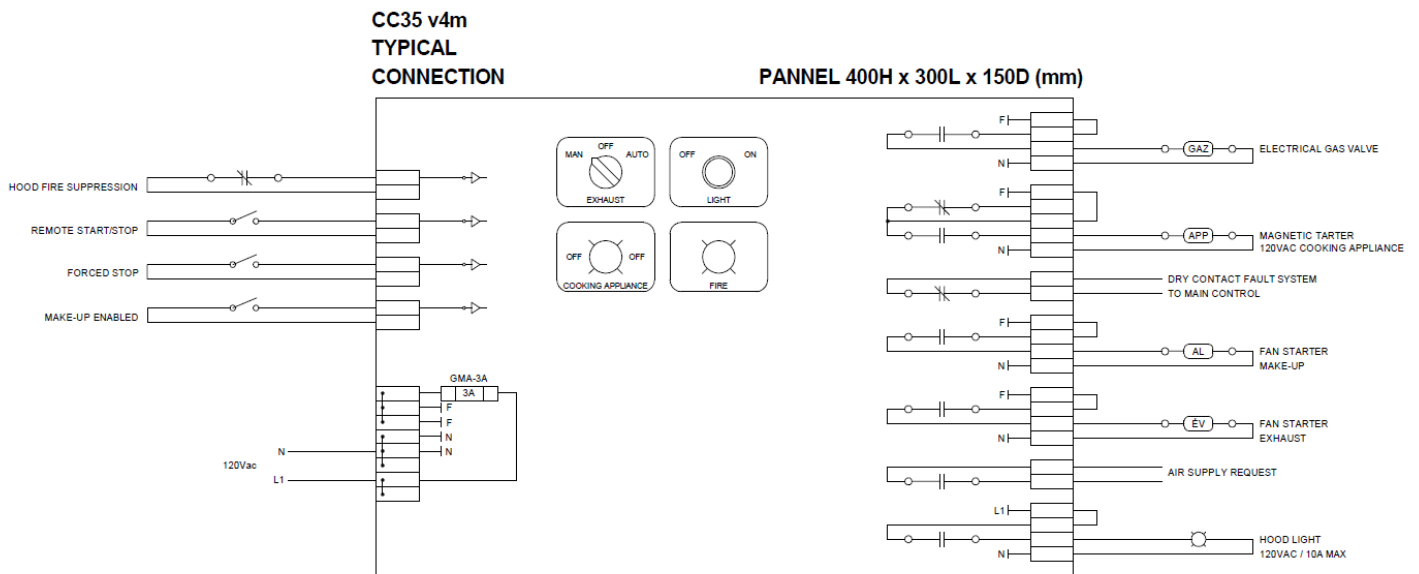

Need a *custom design* ? Contact us !

**CADEXAIR.COM**

\*Specifications and performances are typical and may change without notice

**1 (800) 461-0668**

FT CC35 r1a