



Project Name/No: _____ Item No: _____

Quantity: _____ SIS#: _____ AIA/CSI#: _____

Multi-Appliance Ventless Recirculating Hood

FSH-6




- 72" wide, Type-1, Ventless Recirculating Hood for *electric* fryers, griddles, broilers, ranges and ovens.
- Free-standing, mounts on 72" tall Floor Stand ... maximizes usable hood width.
- No venting to outside required ... generally, can be installed where conventional ventilation hood solutions are prohibitive or too costly for the budget.
- Durable stainless steel construction.
- Proven 4-stage air cleaning technology meets requirements for grease-laden vapor removal for a variety of commercial cooking appliances. Listed to **UL-YZCT (-7 for Canada), complies with ANSI/UL710B.**
- Listed for the **Ansul® R102 Wet Chemical Fire Suppression System**. Hood is factory pre-plumbed, with piping, plenum nozzles, detector link brackets, and link cable conduit with fittings ready for connection to system. Does not include appliance drop-downs & nozzles. **Customer provides the system, field installation, final set-up and commissioning ... must be procured from and installed by an authorized Ansul® Distributor/Dealer (not included with hood purchase).**

Design Features

Ventless Hood System 4-Stage Air Cleaning:

- [1] Two (2) Stainless Steel Baffle Filters (**not seen**) trap large grease particulate.
- [2] Two (2) disposable Pre-Filters trap smaller particulate, and help to remove moisture.
- [3] Two (2) long-life, renewable Electronic Air Cleaner (EAC) Collector Cells electrostatically capture and collect fine particulate on collection fins.
- [4] Two (2) disposable Charcoal Filters help to control cooking aromas in the exhausted air.



Standard Features:

- Built-in appliance interlock.
- **PUSH-TO-START** switch ... hood must be manually restarted after any power interruption, in order to power appliances underneath.
- Complete Filter set included.
- 72" high, full-skirt Floor Stand.

Appliance Limitations: HOOD ONLY APPROVED FOR USE WITH ELECTRICALLY HEATED APPLIANCES ... NO GAS

Appliance Type	Max. Input Power (kW)	Max. Cooking Temp.	Max. Shortening Capacity	Max. Cooking Area
Fryers	40 (Total) or 20 (per Fryer)	350°F [177°C]	160 lbs [72 kg] [Total] 80 lbs [36 kg] [per Fryer]	380 sq in [0.25 sq m] single fryer 760 sq in [0.49 sq m] any combination
Ovens	55	500°F [260°C]	N/A	68-1/2"W x 42"D [1829mm x 1067mm]
Griddles	25	400°F [204°C]	N/A	68-1/2"W x 26"D [1524mm x 660mm]
Ranges	25 Max. 8 Burners	400°F [204°C]	N/A	68-1/2"W x 26"D [1524mm x 660mm]
Broilers (Vert/Horiz)	25	500°F [260°C]	N/A	68-1/2"[1524mm] W x 26"[660mm] D 42" max height (appl top to hood btm)

IMPORTANT INFORMATION !!

Orders for GILES Recirculating/Ventless Hood systems will not be accepted until Giles verifies, 1). that the Purchaser has received all necessary approvals from local authorities, 2). that the appliances to be used are within the hood's listing limitations, and 3). that the Purchaser is aware of specific installation site requirements/limitations (as stated in the **GFSE Recirculating/Ventless Hood Approval Letter**) which must be complied with during installation. The **GFSE Hood Approval Letter (HAL)** must be completed, submitted (along with any requested documentation), and approved by Giles prior to order acceptance. The document is available for download at www.gfse.com under the **SUPPORT** tab in **VENTLESS DOCUMENTS**.

GILES Food Service Equipment ▪ ISO 9001-2015 Registered

PO Box 210247; 2750 Gunter Park Drive W; Montgomery, AL 36109 USA

334.272.1457 ▪ Fax 334.239.4117 ▪ Toll Free 800.554.4537 (US/Canada Only) ▪ www.gfse.com ▪ Email: services@gfse.com



Printed in USA, Form 66034 (Rel. Date: Aug.1998; Rev. Date: Feb.2020, Rev. L

Ventless Hood

Model FSH-6

Project Name/No: _____ Item No: _____

Quantity: _____ SIS#: _____ AIA/CSI#: _____

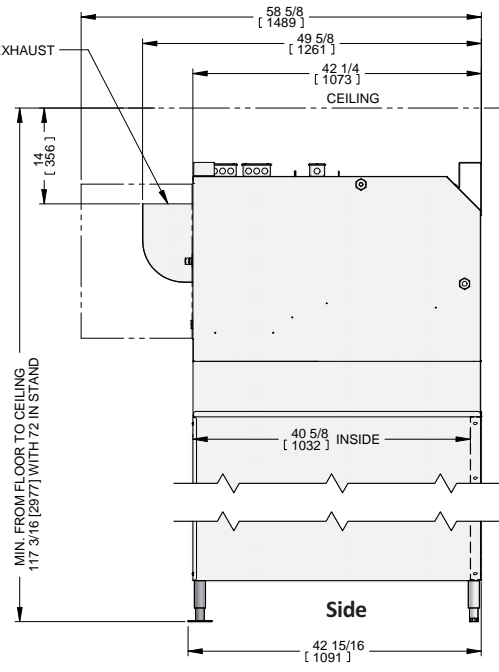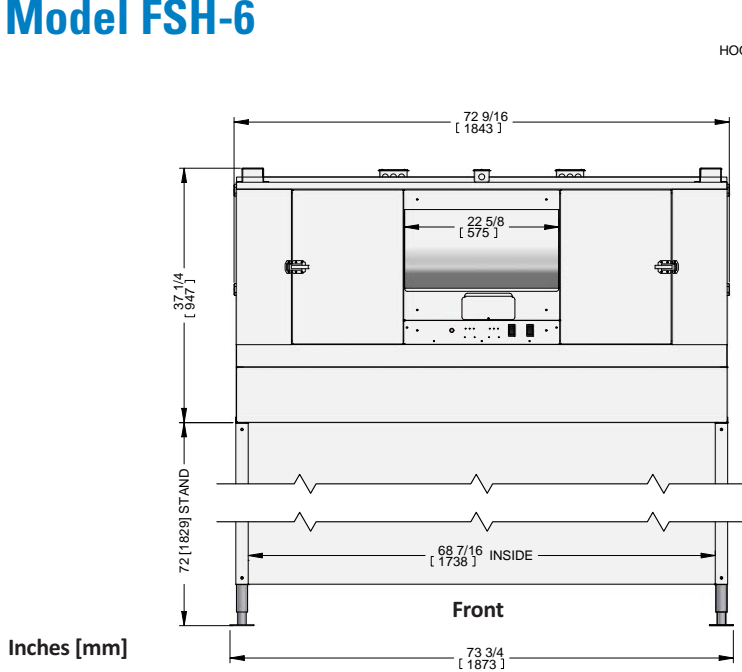

Specifications

Construction: Exterior structure 18-Ga + 20-Ga Stainless Steel

Dimensions		
Width	Depth	Height
72-9/16" [1843 mm]	49-5/8" [1260 mm]	109-1/4" [2775 mm]

Electrical Specifications: Hood Only			
Voltage	Hz	Phase	Amps
208-240	60	1	8
220	50	1	8

- Power cord NOT provided; field wired.
- Neutral line required for lights.

Hood Mechanical Specifications:

Hood Exhaust -	840 to 940 CFM
Sound Level (approx) -	75 dB
Min. Clearance -	14" [336 mm] (Exhaust to Ceiling)

Shipping Specifications:

Crated Wt:	925 lbs [420 kg]
Cube:	56" [1422mm] x 86" [2184mm] x 53" [1346mm] = 147.7 cu ft [4.2 cu m]

Accessory Items Included: (2) Baffle Filters • (2) Pre-Filters • (2) EAC Filter Cells • (2) Charcoal Filters • (1) Tube Sealing Silicone • (1) Can, Spray Foam EAC Cell Cleaner (sample)

IMPORTANT! Before Ordering

- Purchaser must obtain, read, complete, and submit the Giles Hood Approval Letter (HAL) for approval. By signing the HAL, Purchaser affirms that the intended installation site has been assessed and that it is in compliance with the minimum requirements, stated therein ... kitchen size, ceiling height, fresh outside air supply, room air exchange rate, exhaust ventilation, clearances, etc.
- Verify that appliances to be used are within limitations shown in the table on first page ... contact factory to resolve any questions.
- Does available electrical power meet hood specifications?

How To Specify

1 Determine Hood Item Number:

✓	Item Number	Voltage	Hz	Ph	Mount
	71463	208-240	60	1	Floor Stand
	71865	220-230	50	1	

2 Extra Accessories (sold separately)

Specify quantity:

✓	Qty	Description	Part Number
		Pre-Filter	91707
		EAC Filter (Left-side)	20521
		EAC Filter (Right-side)	20520
		Charcoal Filter	32056
		EAC Foaming Spray Cleaner (12-ct Case, 20-oz can)	41510



2750 Gunter Park Drive West • Montgomery, AL 36109 USA
334.272.1457 • Toll Free: 800.554.4537

Specifications and/or product design are subject to change without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.